


McCalmont Township – Team Road



Problem: Groundwater was causing a soft spot in the road base. Excessive runoff flowing down the road ditch was causing severe erosion, resulting in a ravine at the outlet.

Solution: A French mattress was installed to help remove the groundwater from the road base. The road base was built up 12" and crowned to encourage sheet flow. #1 limestone was installed in the ditch to help dissipate and slow down any runoff. R5 & R6 stone was installed in the ravine to stabilize it.

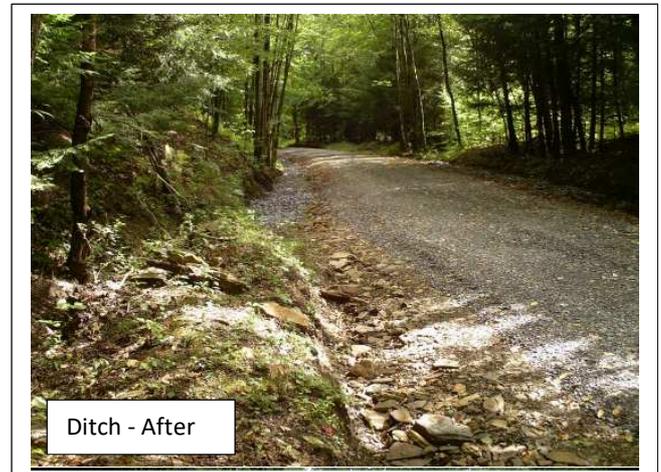